



IS standard



GROWING TOGETHER

AW 702



PRODUCT DATA SHEET



Bias



155

Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance

Cut and Chip
Resistance

Durability



High Load Capacity

High Puncture
Resistance

Stubble Resistance



AW 702

🇬🇧 AW 702 has been developed for implement machinery, trailers and balers in soil tillage and haulage applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs: an "aramid belted" version is available for those who need strengthened puncture resistance, the "HD" version has a special cut-and-chip resistant compound, while the "special" version provides extraordinary stubble resistance.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 12"	7.00 - 12	4.25	-	185	665	295	1948	AB	6	TL	-	95 A8
	7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	-	95 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	STD	8	TL	-	116 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	AB	10	TL	-	121 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	SPL	10	TL	-	121 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	STD	10	TL	-	121 A8
Ø 15.3"	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	8	TT	-	119 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	10	TL	-	123 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	10	TT	-	123 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	12	TL	-	126 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	12	TT	-	126 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	SPL	14	TL	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	14	TL	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	14	TT	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	HD	18	TL	-	135 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	18	TL	-	135 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	22	TL	-	137 A8

AB: Aramid Belted - STD: Standard - SPL: Special - HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference; DW = Drive Wheel; FR = Free Rolling



Bias



155

Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance

Cut and Chip
Resistance

Durability



High Load Capacity

High Puncture
Resistance

Stubble Resistance



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 15.3"	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	-	131 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	-	131 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	-	135 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	-	135 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	-	141 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	-	141 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	-	143 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	-	143 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	-	142 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	14	TT	-	142 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	-	142 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TL	-	144 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	-	144 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	18	TL	-	146 A8

AB: Aramid Belted - STD: Standard - SPL: Special

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference; DW = Drive Wheel; FR = Free Rolling



Bias



Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance

Cut and Chip
Resistance

Durability



High Load Capacity

High Puncture
Resistance

Stubble Resistance



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 16"	6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	334	2197	STD	6	TL	-	95 A8
	6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	334	2197	STD	6	TT	-	95 A8
	6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	334	2197	STD	8	TT	-	103 A8
	10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-	-
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	350	2329	SPL	10	TL	-	123 A8
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	350	2329	STD	10	TL	-	123 A8
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	350	2329	STD	10	TT	-	123 A8
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	343	2112	IND	14	TL	-	130 A8
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	350	2329	STD	14	TL	-	130 A8
	10.5/65 - 16	W 9	W 8; W 8 L	270	760	350	2329	STD	14	TT	-	130 A8
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	-	130 A8
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	-	133 A8
Ø 18"	10.5/80 - 18	W 9	W 8; 9	275	885	395	2593	STD	10	TL	-	131 A8
	10.5/80 - 18	W 9	W 8; 9	275	885	395	2593	STD	14	TL	-	138 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	-	139 A8

STD: Standard - SPL: Special - IND: Industrial

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference; DW = Drive Wheel; FR = Free Rolling



Bias



Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance

Cut and Chip
Resistance

Durability



High Load Capacity


High Puncture
Resistance

Stubble Resistance



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 18"	12.5/80 - 18	W 9	11					STD	12	TL	-	142 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	-	145 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	-	145 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	-	148 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	-	148 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	-	150 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	-	141 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	-	141 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	-	144 A8
	14.5/80 - 18	11.0	12; 13	374	1047	446	3068	STD	12	TT	-	155 A8

STD: Standard - SPL: Special

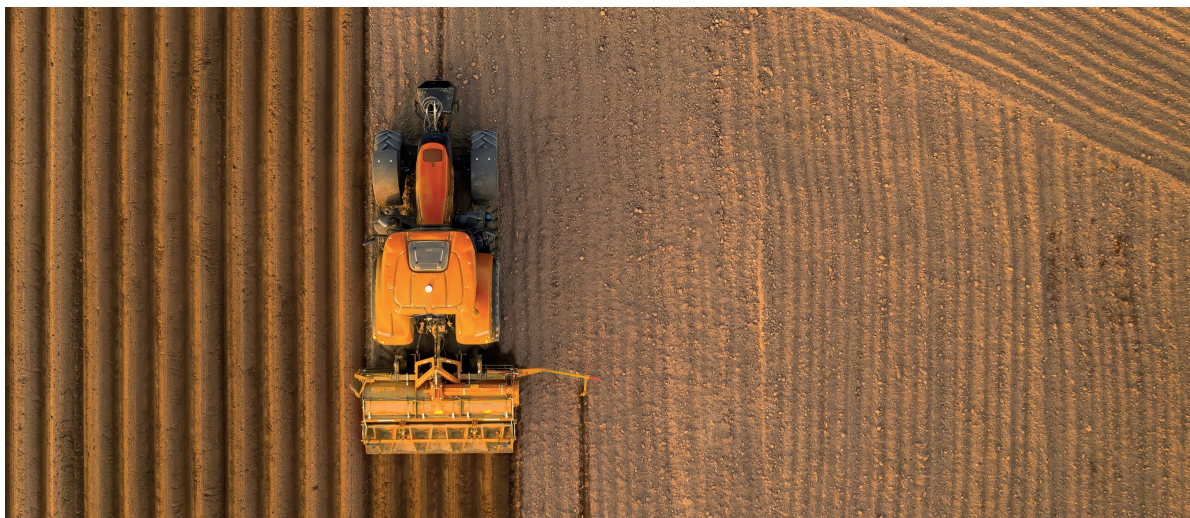

Tolerances: O.D. $\pm 2\%$ - S.W. $\pm 2\%$ - RC $\pm 2.5\%$ - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter;
SLR = Static Loaded Radius; RC = Rolling Circumference; DW = Drive Wheel; FR = Free Rolling