




IS standard



GROWING TOGETHER

# XL GRIP IND3 (RTG)

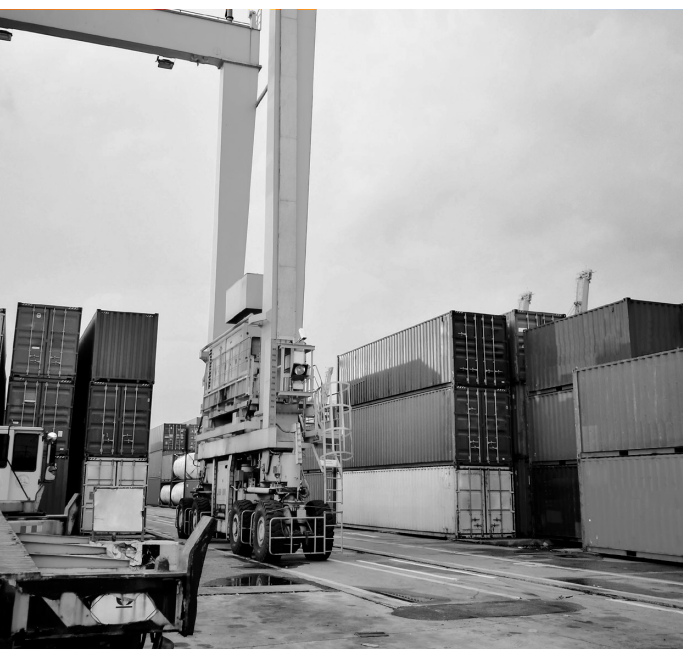

PRODUCT DATA SHEET



Bias



# XL GRIP IND3 (RTG)

XL GRIP (IND-3) is a bias-ply tire for RTG cranes in stacking and lifting applications. The tire features a strong casing made of a specially formulated tread compound, which provides an extended tire life-cycle.

## Technologies



Heavy Duty

## Performance



Cut and Chip Resistance



Durability




Hard Surfaces



Stability

	Tire size	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
Ø 25"	16.00 - 25	TL	32	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0
	18.00 - 25	TL	40	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5
	18.00 - 25	TL	32	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5
	21.00 - 25	TL	32	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0
	21.00 - 25	TL	36	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0
	21.00 - 25	TL	40	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0
	21.00 - 25	TL	44	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0
Ø 29"	24.00 - 29	TL	42	-	IND	656	1994	900	5860	17.00/3.5	-
Ø 35"	21.00 - 35	TL	36	-	IND	580	2020	928	5980	15.00/3.0	-
	21.00 - 35	TL	40	-	IND	580	2020	928	5980	15.00/3.0	-
	24.00 - 35	TL	48	-	IND	655	2130	975	6302	17.00/3.5	-

IND: Industrial

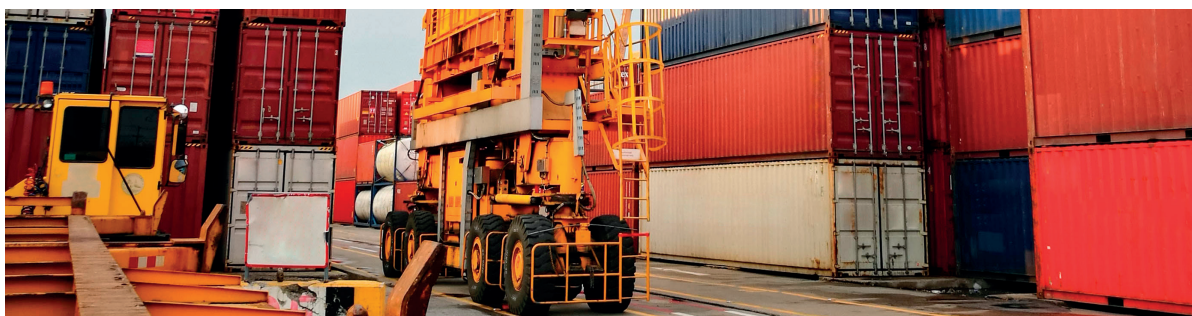

Tolerances: O.D.  $\pm 2\%$  - O.W.  $\pm 2\%$  - RC  $\pm 2.5\%$  - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference