




LONG HAUL

AS898



High mileage tyres suitable for long haul application (High mileage formula, high saturation, Large parameters)




The main ditch adopts a zigzag design with groove bottom patterns. Strengthen stone removal performance to avoid tyre malfunctions




Footprint

Finite element simulation analysis. More uniform distribution of tyre contact pressure, improve uneven wear performance



Belt Durability

Optimal belt gap minimize shearing force between the belts with ZC-Rubber's CBOT technology

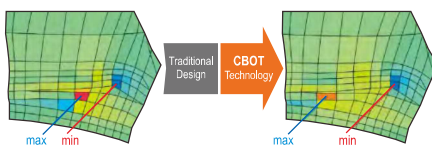

	Size	LR / PR	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
								Single				Dual			
								(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
●	9.5R17.5	J/18	143/141J	13.0	6.75	840	234	2725	6005	875	128	2575	5675	875	128
●	215/75R17.5	H/16	135/133J	13.0	6.00	765	216	2180	4805	850	123	2060	4540	850	123
●	235/75R17.5	H/16	143/141J	13.5	6.75	792	236	2725	6005	875	128	2575	5675	875	128
●	11R22.5	H/16	148/145L	17.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123
●	12R22.5	J/18	152/149L	18.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135
●	295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
●	315/80R22.5	J/18	154/151M(156/153L)	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120

● Made in China ● Made in Thailand