


RP28



Benefits and Features

- A comfortable ride premium touring tyre
- Computer aided designed tread offering low noise and excellent water drainage
- SILICA TECH compounding technology ensuring low rolling resistance and saving fuel expenditure
- Improved shoulder sipes providing better handling during cornering

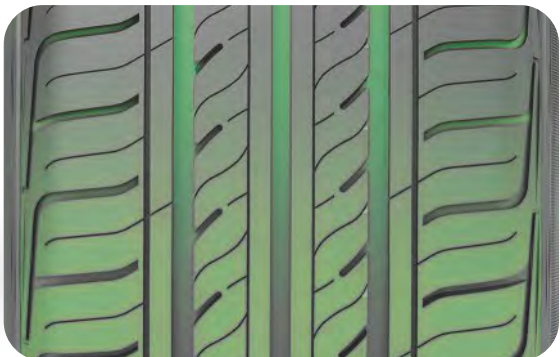

Silent

Comfortable

Braking

Efficiency



Rim Size	13 - 16
Series	45 - 80
Speed Rating	T - V

RP28

Rim (inch)	Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG	TT/TL
13"	155/65R13	73T	4.5J	157	532	365	300	400 A A	TL
	165/65R13	77T	5.0J	170	544	412	300	400 A A	TL
	155/70R13	75T	4.5B	157	548	387	300	400 A A	TL
	165/70R13	79T	5.0B	170	562	437	300	400 A A	TL
	175/70R13	82T	5.0B	177	576	475	300	400 A A	TL
	185/70R13	86T	5.5J	189	590	530	300	400 A A	TL
	155/80R13	79T	4.5B	157	578	437	300	400 A A	TL
	165/80R13	83T	4.5B	165	594	487	300	400 A A	TL
	165/55R14	72V	5.0J	170	538	355	300	400 A A	TL
	185/55R14	80V	6.0J	194	560	450	300	360 A A	TL
14"	165/60R14	75H	5.0J	170	554	387	300	400 A A	TL
	175/60R14	79H	5.0J	177	566	437	300	400 A A	TL
	185/60R14	82H	5.5J	189	578	475	300	400 A A	TL
	195/60R14	86H	6.0J	201	590	530	300	440 A A	TL
	205/60R14	88H	6.0J	209	602	560	300	440 A A	TL
	155/65R14	75T	4.5J	157	558	387	300	400 A A	TL
	165/65R14	79T	5.0J	170	570	437	300	400 A A	TL
	175/65R14	82H	5.0J	177	584	475	300	400 A A	TL
	185/65R14	86H	5.5J	189	596	530	300	400 A A	TL
	195/65R14	89H	6.0J	201	610	580	300	440 A A	TL
15"	165/70R14	81T	5.0J	170	588	462	300	400 A A	TL
	175/70R14	84T	5.0J	177	602	500	300	400 A A	TL
	185/70R14	88T	5.5J	189	616	560	300	400 A A	TL
	195/70R14	91T	6.0J	201	630	615	300	440 A A	TL
	205/70R14	95T	6.0J	209	644	690	300	440 A A	TL
	165/80R14	85T	4.5J	165	620	515	250	400 A A	TL
	175/80R14	88T	5.0J	177	636	560	300	400 A A	TL
	185/80R14	91T	5.0J	184	652	615	300	400 A A	TL
	195/50R15	82V	6.0J	201	577	475	300	360 A A	TL
	165/55R15	75V	5.0J	170	563	387	300	400 A A	TL
16"	185/55R15	82V	6.0J	194	585	475	300	360 A A	TL
	195/55R15	85V	6.0J	201	595	515	300	360 A A	TL
	165/60R15	77V	5.0J	170	579	412	300	400 A A	TL
	175/60R15	81H	5.0J	177	591	462	300	400 A A	TL
	185/60R15	84H	5.5J	189	603	500	300	400 A A	TL
	195/60R15	88H	6.0J	201	615	560	300	440 A A	TL
	205/60R15	91H	6.0J	209	627	615	300	440 A A	TL
	215/60R15	94H	6.5J	221	639	670	300	440 A A	TL
	165/65R15	81H	5.0J	170	595	462	300	400 A A	TL
	175/65R15	84H	5.0J	177	609	500	300	400 A A	TL
17"	185/65R15	88H	5.5J	189	621	560	300	400 A A	TL
	195/65R15	91H	6.0J	201	635	615	300	440 A A	TL
	205/65R15	94H	6.0J	209	647	670	300	440 A A	TL
	215/65R15	96H	6.5J	221	661	710	300	440 A A	TL
	205/70R15	96H	6.0J	209	669	710	300	440 A A	TL
	215/70R15	98H	6.5J	221	683	750	300	440 A A	TL
	165/45R16	75V	5.5J	165	554	375	350	400 A A	TL
	195/50R16	84V	6.0J	201	602	500	300	360 A A	TL
	205/50R16	87V	6.5J	214	612	545	300	360 A A	TL
	185/55R16	83V	6.0J	194	610	487	300	360 A A	TL
18"	195/55R16	87V	6.0J	201	620	545	300	360 A A	TL
	205/55R16	91V	6.5J	214	632	615	300	360 A A	TL
	215/55R16	93V	7.0J	226	642	650	300	360 A A	TL
	225/55R16	95V	7.0J	233	654	690	300	360 A A	TL
	195/60R16	89H	6.0J	201	640	580	300	440 A A	TL
	205/60R16	92H	6.0J	209	652	630	300	440 A A	TL
	215/60R16	95H	6.5J	221	664	690	300	440 A A	TL
	225/60R16	98H	6.5J	228	676	750	300	440 A A	TL
	235/60R16	100H	7.0J	240	688	800	300	440 A A	TL
	205/65R16	95H	6.0J	209	672	690	300	440 A A	TL
19"	215/65R16	98H	6.5J	221	686	750	300	440 A A	TL
	225/65R16	100H	6.5J	228	698	800	300	440 A A	TL
20"	235/65R16	103H	7.0J	240	712	875	300	440 A A	TL

🇨🇳 Made in China 🇹🇭 Made in Thailand

