


MUD LEGEND SL366



Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand

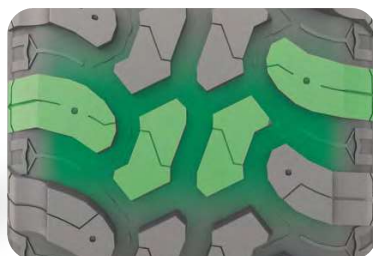

M+S

Rim Size	14 - 20
Series	50 - 85
Speed Rating	Q - T

MUD LEGEND SL366

Rim (inch)	Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG	TT/TL	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
18"	265/60R18	110T	8.0J	272	775	1060	300	500 A A	TL	14"	185R14C	D/8PR	102/100Q	5.5J	188	650	850/900	450	TL
	285/60R18	116T	8.5J	282	799	1250	300	500 A A	TL		195R14C	D/8PR	106/104Q	5.5J	198	666	950/900	450	TL
20"	265/50R20 XL	111T	8.5J	277	774	1090	350	500 A A	TL	15"	205/70R15C	C/6PR	104/102Q	6.0J	209	669	900/850	375	TL
	275/55R20	113S	8.5J	284	810	1150	300	500 A A	TL		30x9,50R15LT	C/6PR	104Q	7.5J	240	756	900	350	TL
											31x10,50R15LT	C/6PR	109Q	8.5J	268	781	1030	350	TL
											32x11,50R15LT	C/6PR	113Q	9.0J	290	807	1150	350	TL
											33x12,50R15LT	C/6PR	108Q	10.0J	318	832	1000	250	TL
											35x12,50R15LT	C/6PR	113Q	10.0J	318	883	1150	250	TL
											LT215/75R15	C/6PR	100/97Q	6.0J	216	703	800/730	350	TL
											LT225/75R15	C/6PR	102/99Q	6.0J	223	719	850/775	350	TL
											LT235/75R15	C/6PR	104/101Q	6.5J	235	739	900/825	350	TL
											LT235/75R15	D/8PR	110/107Q	6.5J	235	739	1060/975	450	TL
16"	205R16C	D/8PR	110/108Q	6.0J	208	736	1060/1000	450	TL	16"	LT225/75R16	E/10PR	115/112Q	6.0J	223	750	1215/1120	550	TL
	LT225/75R16	E/10PR	115/112Q	6.0J	223	750	1215/1120	550	TL		LT245/75R16	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	TL
	LT245/75R16	E/10PR	123/120Q	7.5J	267	810	1550/1400	550	TL		LT265/75R16	E/10PR	126/123Q	8.0J	286	840	1700/1550	550	TL
	LT285/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL		LT315/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL
	LT315/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL		LT235/85R16	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	TL
	LT235/85R16	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	TL	17"	35x12,50R17LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
17"	35x12,50R17LT	E/10PR	121Q	10.0J	318	883	1450	450	TL		37x12,50R17LT	D/8PR	124Q	10.0J	318	934	1600	350	TL
	37x12,50R17LT	D/8PR	124Q	10.0J	318	934	1600	350	TL		LT265/65R17	E/10PR	120/117Q	8.0J	272	775	1400/1285	550	TL
	LT265/65R17	E/10PR	120/117Q	8.0J	272	775	1400/1285	550	TL		LT245/70R17	E/10PR	119/116Q	7.0J	248	782	1360/1250	550	TL
	LT245/70R17	E/10PR	119/116Q	7.0J	248	782	1360/1250	550	TL		LT265/70R17	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	TL
	LT265/70R17	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	TL		LT285/70R17	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	TL
18"	35x12,50R18LT	E/10PR	123Q	10.0J	318	883	1550	450	TL	20"	33x12,50R20LT	E/10PR	114Q	10.0J	318	832	1180	450	TL
	33x12,50R20LT	E/10PR	114Q	10.0J	318	832	1180	450	TL		35x12,50R20LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
20"	35x12,50R20LT	E/10PR	121Q	10.0J	318	883	1450	450	TL										

● Made in China

