


RideMax G-118



Benefits and Features

- High comfort touring tyre with a quiet and smooth ride
- Improved tyre structure guarantees stable handling and cornering
- Five strong tread ribs enhanced steering precision and mileage
- Variable pitch tread design helps reduce noise

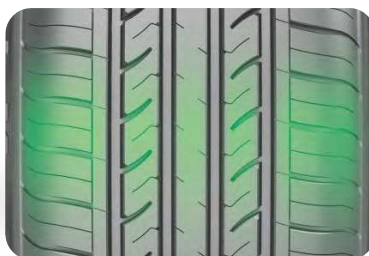

Rim Size 13 - 20
Series 35 - 80
Speed Rating T - W

RideMax G-118

Rim (inch)	Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG	T/T/TL
13"	155/65R13	73T	4.5J	157	532	365	300	480 A A	TL
	165/65R13	77T	5.0J	170	544	412	300	480 A A	TL
	155/70R13	75T	4.5J	157	548	387	300	480 A A	TL
	165/70R13	79T	5.0J	170	562	437	300	480 A A	TL
	175/70R13	82T	5.0J	177	576	475	300	480 A A	TL
	185/70R13	86T	5.5J	189	590	530	300	480 A A	TL
	175/75R13	85T	5.0J	177	592	515	300	480 A A	TL
	155/80R13	79T	4.5J	157	578	437	300	480 A A	TL
14"	165/55R14	72T	5.0J	170	538	355	300	480 A A	TL
	165/60R14	75H	5.0J	170	554	387	300	480 A A	TL
	185/60R14	82H	5.5J	189	578	475	300	480 A A	TL
	195/60R14	86H	6.0J	201	590	530	300	480 A A	TL
	205/60R14	88H	6.0J	209	602	560	300	480 A A	TL
	155/65R14	75T	4.5J	157	558	387	300	480 A A	TL
	165/65R14	79H	5.0J	170	570	437	300	480 A A	TL
	165/70R14	81T	5.0J	170	588	462	300	480 A A	TL
	205/70R14	95T	6.0J	209	644	690	300	480 A A	TL
	175/65R14	82H	5.0J	177	584	475	300	480 A A	TL
	185/65R14	86H	5.5J	189	596	530	300	480 A A	TL
	175/70R14	84T	5.0J	177	602	500	300	480 A A	TL
15"	185/70R14	88T	5.5J	189	616	560	300	480 A A	TL
	195/70R14	91T	6.0J	201	630	615	300	480 A A	TL
	175/75R14	87T	5.0J	177	618	545	300	480 A A	TL
	195/50R15	82V	6.0J	201	577	475	300	480 A A	TL
	165/55R15	75V	5.0J	170	563	387	300	480 A A	TL
	185/55R15	82V	6.0J	194	585	475	300	480 A A	TL
	195/55R15	85V	6.0J	201	595	515	300	480 A A	TL
	165/60R15	77H	5.0J	170	579	412	300	480 A A	TL
	185/60R15	84H	5.5J	189	603	500	300	480 A A	TL
	195/60R15	88V	6.0J	201	615	560	300	480 A A	TL
	205/60R15	91H	6.0J	209	627	615	300	480 A A	TL
	165/65R15	81H	5.0J	170	595	462	300	480 A A	TL
16"	175/65R15	84H	5.0J	177	609	500	300	480 A A	TL
	185/65R15	88H	5.5J	189	621	560	300	480 A A	TL
	195/65R15	91V	6.0J	201	635	615	300	480 A A	TL
	205/65R15	94V	6.0J	209	647	670	300	480 A A	TL
	205/70R15	96H	6.0J	209	669	710	300	480 A A	TL
	215/70R15	98H	6.5J	221	683	750	300	480 A A	TL
	195/50R16	84V	6.0J	201	602	500	300	480 A A	TL
	185/55R16	83V	6.0J	195	610	487	300	480 A A	TL
16"	195/55R16	87V	6.0J	201	620	545	300	480 A A	TL
	205/55R16	94W	6.5J	214	632	670	350	480 A A	TL
	215/55R16	93V	7.0J	226	642	650	300	480 A A	TL
	225/55R16	95V	7.0J	233	654	690	300	480 A A	TL
	195/60R16	89H	6.0J	201	640	580	300	480 A A	TL
	205/60R16	92V	6.0J	209	652	630	300	480 A A	TL
	215/60R16 XL	99V	6.5J	221	664	775	350	480 A A	TL
	225/60R16	98H	6.5J	228	676	750	300	480 A A	TL
	235/60R16	100H	7.0J	240	688	800	300	480 A A	TL
	205/65R16	95H	6.0J	209	672	690	300	480 A A	TL
	215/65R16	98V	6.5J	221	686	750	300	480 A A	TL
	205/40R17 XL	84W	7.5J	212	596	500	350	480 A A	TL
17"	215/40R17XL	87W	7.5J	218	604	545	350	480 A A	TL
	205/45R17 XL	88W	7.0J	206	616	560	350	480 A A	TL
	215/45R17 XL	91W	7.0J	213	626	615	350	480 A A	TL
	225/45R17 XL	94W	7.5J	225	634	670	350	480 A A	TL
	235/45R17 XL	97W	8.0J	236	644	730	350	480 A A	TL
	205/50R17 XL	93W	6.5J	214	638	650	350	480 A A	TL
	215/50R17XL	95W	7.0J	226	648	690	350	480 A A	TL
	225/50R17 XL	98W	7.0J	233	658	750	350	480 A A	TL
	215/55R17 XL	98W	7.0J	226	668	750	350	480 A A	TL
	225/55R17 XL	101W	7.0J	233	680	825	350	480 A A	TL
	235/55R17 XL	103W	7.5J	245	690	875	350	480 A A	TL
	225/40R18	92W	8.0J	230	637	630	350	480 A A	TL
18"	235/40R18	95W	8.5J	241	645	690	350	480 A A	TL
	245/40R18	97W	8.5J	248	653	730	350	480 A A	TL
	215/45R18	93W	7.0J	213	651	650	350	480 A A	TL
	225/45R18	95W	7.5J	225	659	690	350	480 A A	TL
	235/45R18	98W	8.0J	236	669	750	350	480 A A	TL
	245/45R18	100W	8.0J	243	677	800	350	480 A A	TL
	225/50R18	95W	7.0J	233	683	690	300	480 A A	TL
	235/50R18	97V	7.5J	245	693	730	300	480 A A	TL
	215/55R18	99V	7.0J	226	693	775	350	480 A A	TL
	225/55R18	98V	7.0J	233	705	750	300	480 A A	TL
	235/55R18	100V	7.5J	245	715	800	300	480 A A	TL
	225/60R18	100H	6.5J	228	727	800	300	480 A A	TL
19"	235/60R18	107V	7.0J	240	739	975	350	480 A A	TL
	245/35R19	93W	8.5J	248	655	650	350	480 A A	TL
19"	245/40R19	94W	8.5J	248	679	670	300	480 A A	TL
	245/35R20 XL	95W	8.5J	248	680	690	350	480 A A	TL

● Made in China

